

GPF-2

BSL


Materials: Tool steel
Material: acero

SHEAR BEAM TYPE LOAD CELL

CELDA DE CARGA DOBLE VIGA AL CORTE



Datos técnicos grales.	Main technical data	Unit	Technical quota
Sensibilidad	Sensitivity	m V/V	3±0.01
Alinealidad	Nonlinearity	% FS	± 0.02
Histeresis	Hysteresis		
Repetibilidad	Repeatability	% FS	0.01
Creep	Creep	% FS/30min	± 0.02
Balance de cero	Zero balance	% FS	± 1
Coeficiente temp. en cero	Zero temperature coefficient	% FS / 10°C	± 0.02
Coeficiente temp. en carga	Rated output temperature coefficient	% FS / 10°C	
Resistencia de entrada	Input resistance	Ω	700 ± 10
Resistencia de salida	Output resistance	Ω	700 ± 5
Resistencia de aislación	Insulation resistance	M Ω	≥ 5000
Tensión excitación	Supply Voltage	V	10 (DC / AC) MAX: 15 (DC / AC)
Rango compensado de temp.	Temperature compensation range	°C	-10~+50
Temperatura límite	Safe temperature range	°C	-20~+60
Seguridad de sobrecarga	Safe overload	% FS	120
Cable de conexión	Connect cable	mm	Ø5 x 10000
Método de conexión	Method of connecting wire	input: Red (+) Black (-) Output Green (+) White (-)	

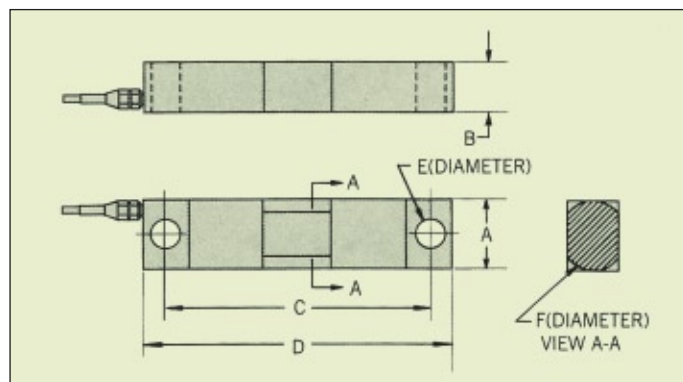

CAPACIDAD RATED LOAD: Lb	Size: inch					
	A	B	C	D	E	F
1-5K	1.24	1.24	6.25	7.70	0.50	1.24
10-25K	1.94	1.44	7.50	8.75	0.75	1.99
50-75K	2.94	2.44	11.50	13.5	1.06	3.00